ANT-LTE-ANF-04

Full-band GSM/GPRS/EDGE/UMTS/HSPA/LTE, 4 dBi, omni-directional IP66 outdoor antenna



- > Cylindrical style, providing better performance at low bandwidths
- > Anti-UV material for better durability
- > IP66-level water resistance
- > Ventilation holes for draining internal condensation buildup

Specifications

Antenna Characteristics

Frequency Range: 700/800/900/1700/1800/1900/2100/2600 MHz

Antenna Type: Omni-directional Typical Antenna Gain:
3 dBi @ 698 to 969 MHz
4 dBi @ 1710 to 2700 MHz
Connector: N-type (female)
Impedance: 50 ohms
Polarization: Vertical
V.S.W.R.: £ 2.5

Physical Characteristics

Weight: 281 g


Dimensions: Length=124 mm Radome Color: White Radome Material: ABS Installation: L bracket Environmental Limits

Operating Temperature: -30 to 70°F (-22 to 158°F) Storage Temperature: -40 to 85°C (-40 to 185°F)

Warranty

Warranty Period: 1 year

Details: See www.moxa.com/warranty

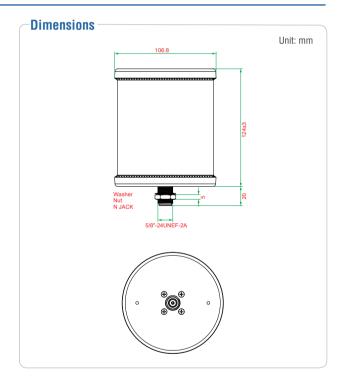

Ordering Information

Available Models

ANT-LTE-ANF-04: GSM/GPRS/EDGE/UMTS/HSPA/LTE band 700/800/900/1700/1800/1900/2100/2600 MHz, 4 dBi, omni-directional, N-type (female)

Optional Accessories (can be purchased separately)

CRF-SMA(M)/N(M)-300: N-type (male) to SMA (male), CFD200 cable, 3 m

Can be used with the following products

Model Names: OnCell G2000 Series, OnCell G3000 Series, OnCell G3100-HSPA Series, OnCell 5000-HSPA Series, OnCell G3150A-LTE, OnCell G3470A-LTE, WDR-3124A