



- Features :
 - 2:1 wide input range
 - Protections: Short circuit/Over load /voltage
 - Built-in EMI filter, low ripple noise
 - 100% full load burn-in test
 - Low cost
 - High reliability
 - 2 years warranty



GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>




AS/NZS62368-1 TPTC004

SPECIFICATION

| MODEL | | SD-15A-05 | SD-15B-05 | SD-15C-05 | SD-15A-12 | SD-15B-12 | SD-15C-12 | SD-15A-24 | SD-15B-24 | SD-15C-24 |
|---------------------------|---|---|-----------|--------------|---|-------------|-----------|----------------------|-----------|-----------|
| OUTPUT | DC VOLTAGE | 5V | | | 12V | | | 24V | | |
| | RATED CURRENT | 3A | | | 1.25A | | | 0.625A | | |
| | CURRENT RANGE | 0 ~ 3A | | | 0 ~ 1.25A | | | 0 ~ 0.625A | | |
| | RATED POWER | 15W | | | 15W | | | 15W | | |
| | RIPPLE & NOISE (max.) Note.2 | 100mVp-p | | | 120mVp-p | | | 150mVp-p | | |
| | VOLTAGE ADJ. RANGE | 4.75~5.5VDC | | | 10.8~13.2VDC | | | 21.6~26.4VDC | | |
| | VOLTAGE TOLERANCE Note.3 | ±2.0% | | | ±1.0% | | | ±1.0% | | |
| | LINE REGULATION | ±0.5% | | | ±0.3% | | | ±0.2% | | |
| | LOAD REGULATION | ±0.5% | | | ±0.3% | | | ±0.2% | | |
| SETUP, RISE ,HOLD UP TIME | 2.5s, 25ms, --- 12VDC/24VDC/48VDC at full load | | | | | | | | | |
| INPUT | VOLTAGE RANGE | A: 9.2 ~18VDC | | B:18 ~ 36VDC | | C:36~72VDC | | | | |
| | EFFICIENCY(Typ.) | 68% | 76% | 75% | 72% | 76% | 79% | 70% | 77% | 78% |
| | DC CURRENT(Typ.) | 1.9A/12VDC | | 0.9A/24VDC | | 0.45A/48VDC | | | | |
| PROTECTION | OVER LOAD | 105 ~ 160% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | |
| | OVER VOLTAGE | 5.75 ~ 6.75V | | | 13.8~ 16.2V | | | 27.6 ~ 32.4V | | |
| ENVIRONMENT | WORKING TEMP. | -10 ~ +60°C (Refer to "Derating Curve") | | | | | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -20 ~ +85°C, 10 ~ 95% RH | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03%/°C (0 ~ 50°C) | | | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, 60min.each along X, Y, Z axes | | | | | | | | |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS | EAC TP TC 004 approved, design refer to AS/NZS 62368.1 | | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:1.5KVAC I/P-FG:1KVAC O/P-FG:0.5KVAC | | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P,I/P-FG,O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH | | | | | | | | |
| | EMC EMISSION | Compliance to BS EN/EN55032(CISPR32), EAC TP TC 020 | | | | | | | | |
| OTHERS | EMC IMMUNITY | Compliance to BS EN/EN61000-4-2,3,4,6,8, BS EN/EN55024, light industry level, EAC TP TC 020 | | | | | | | | |
| | MTBF | 3861.2K hrs min. | | | Telcordia SR-332 (Bellcore) ; 644.2K hrs min. | | | MIL-HDBK-217F (25°C) | | |
| | DIMENSION | 78*51*28mm (L*W*H) | | | | | | | | |
| NOTE | PACKING | 0.18Kg,60 PCS/11.8Kg | | | | | | | | |
| | 1. All parameters NOT specially mentioned are measured at normal input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx | | | | | | | | | |


■ Mechanical Specification

Case No. 931A Unit:mm

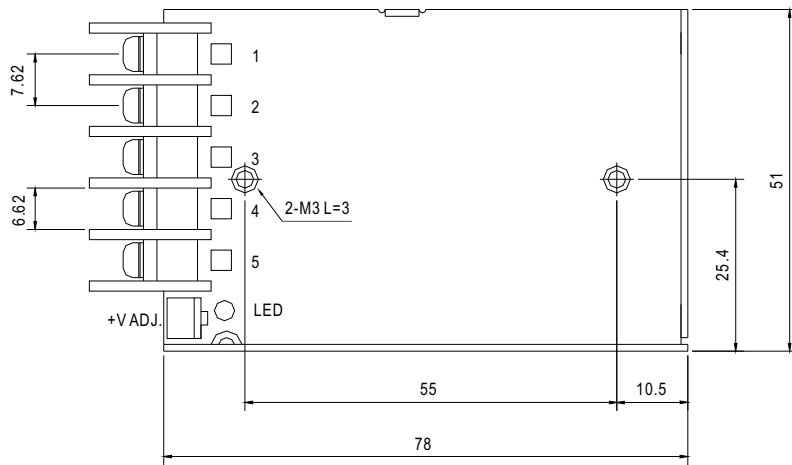


Terminal Pin No. Assignment

| Pin No. | Assignment | Pin No. | Assignment |
|---------|-------------|---------|--------------|
| 1 | DC INPUT V+ | 4 | DC OUTPUT +V |
| 2 | DC INPUT V- | 5 | DC OUTPUT -V |
| 3 | FG \equiv | | |

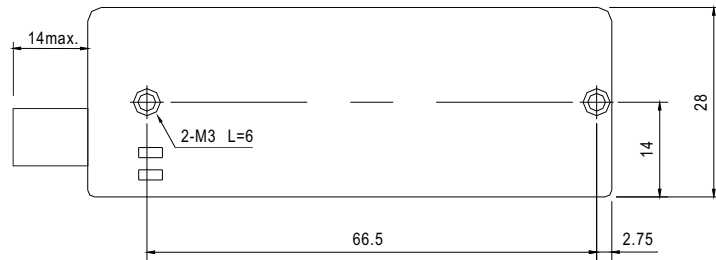

■ Block Diagram

fosc : 96KHz

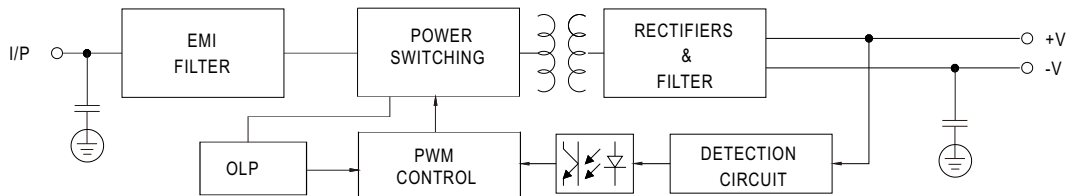

■ Derating Curve

